




技术参数/Technical parameters

Insulation Resistance	: >2MΩ	Dimension	: 853 X 652 X 1225mm
Leakage Current	: <10mA	Communication Protocol	: USITT DMX512 (1990)
Ballast	: Electronic ballast	DMX Channels	: 16 CHS
Electronic Safety Class	: Class I	Focus	: Linear Adjustment 0~13°
E S D Protection	: IEC61000-4	Dimmer	: Electronic linear dimming
Light Source Brand	: China-Made	Electronic Strobe	: 1~17 Times/Second
CRI	: Ra>90	Mechanical Shutter	: 5 Times/Second
Color Temperature	: 6000K	Working Temperature	: -30°C~60°C
Housing Material	: Aluminum Alloy & heat-proof Engineering Plastic	Cooling System	: With rapid-speed cooling fan

Parameters	7000	Parameters	5000
Rated Voltage	AC 380V 50/60HZ	Rated Voltage	AC 180~240V 50/60HZ
Light Source Power	7000W	Light Source Power	5000W
Light Source Type	Xenon Lamp	Light Source Type	Xenon Lamp
Light Source Lifespan	800 Hours	Light Source Model	XQ5000
Beam Angle	-10°~0°~13° adjustable	Light Source Lifespan	700 Hours
Weight	108KG	Weight	105KG
Temperature Detect	Overheating protection	Temperature Detect	Overheating protection
Color	CMY color mixing system and lambency	Color	CMY color mixing system and lambency
X-axis	330°/1.8°micro-adjustment	X-axis	360°/1.8°micro-adjustment
Y-axis	330°/1.8°micro-adjustment	Y-axis	330°/1.8°micro-adjustment
IP Rating	IP55	IP Rating	IP55

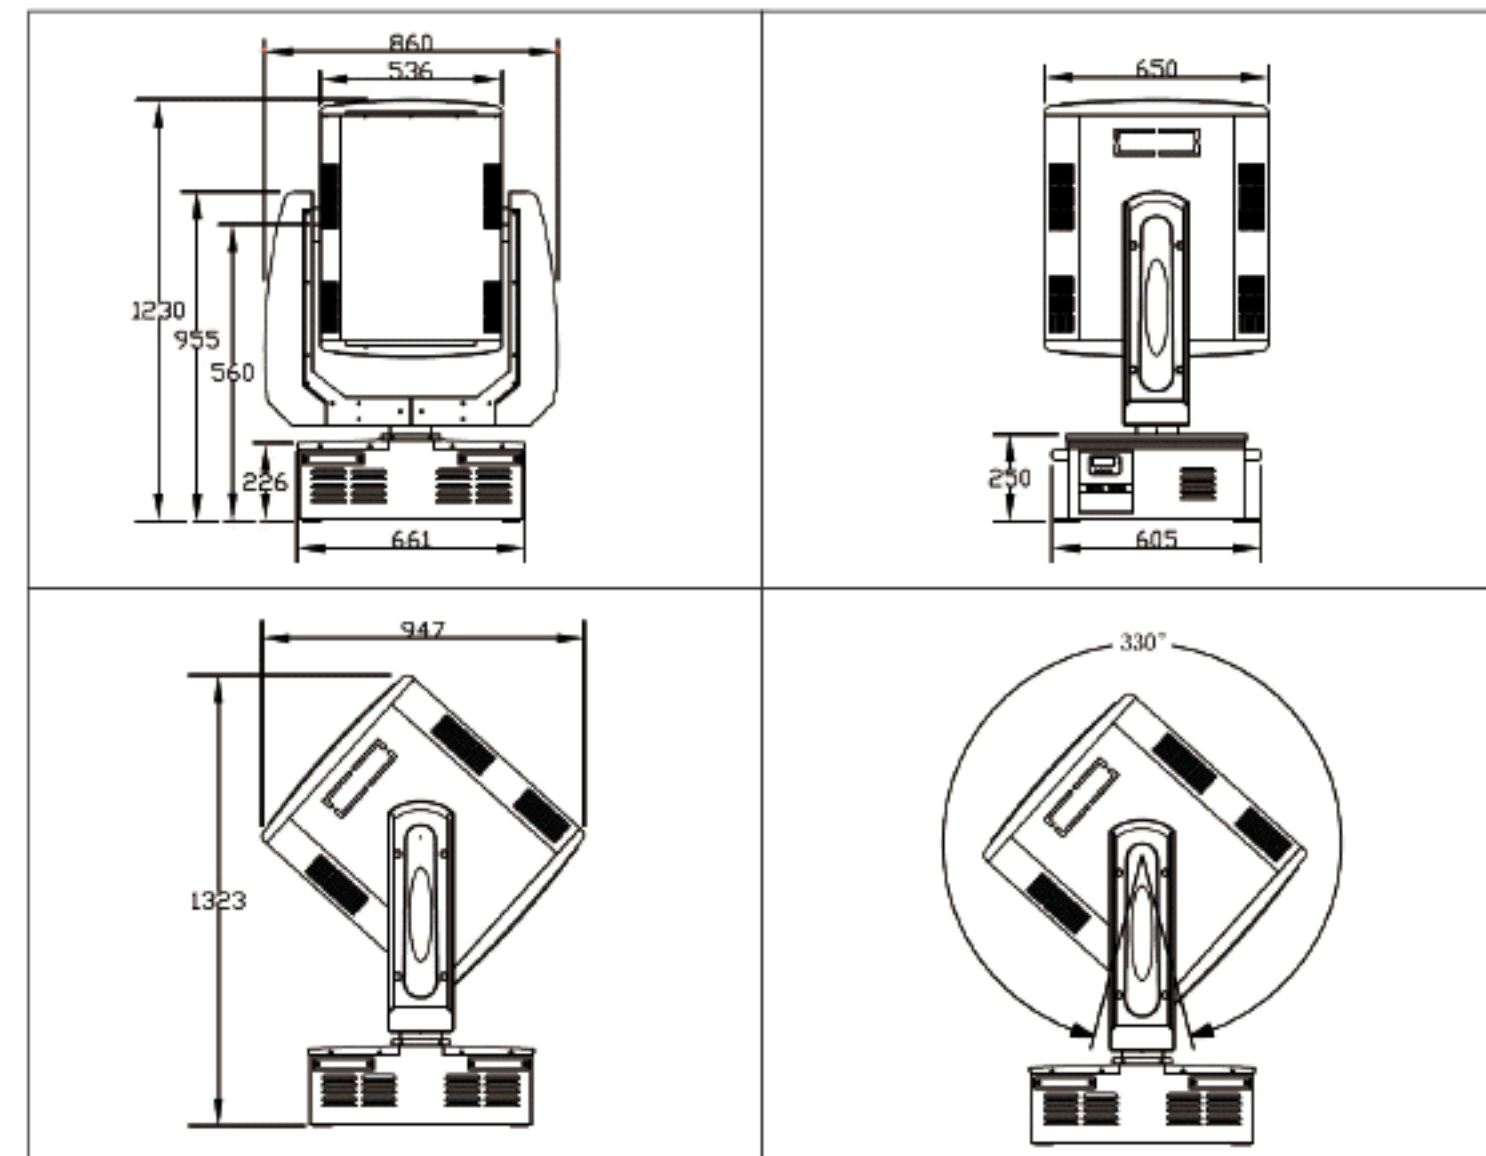